




◆ 型号含义 Type description

L Z Z Q B 6 - 10

额定电压 (kV) Rated voltage(kV)
 设计序号 Design No.
 带有保护级 With protective class
 加强型 Strengthen
 浇注绝缘 Cast-resin insulated
 支柱式 Seat type
 电流互感器 Current transformer

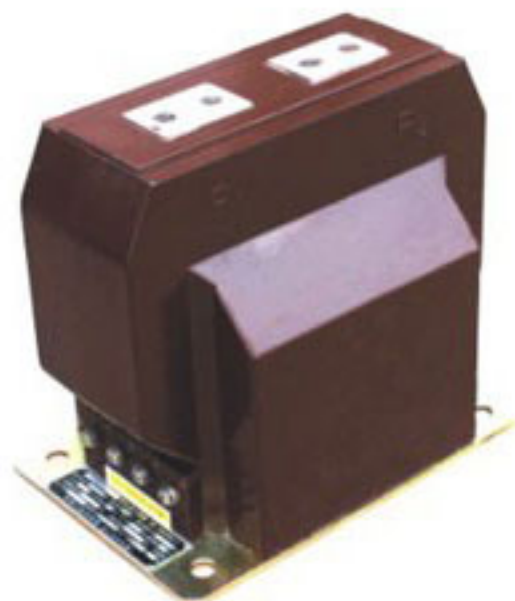

◆ 技术参数 Technical data

产品型号 Type	额定电流比 Rated transformation ratio(A)	级次组合 Accuracy Classes combination	准确级及额定输出 (VA) Accuracy class and rated output COS φ=0.8				一秒热稳定电流 1s thermal current (kA)	动稳定电流 Rated dynamic current(kA)
			0.2S	0.2	0.5	10P15		
LZZB6-10	5/5	0.2S/10P10 0.2/10P10 0.5/10P10	10	10	10	(10P10) 15	0.8	1.9
	10/5						1.5	3.8
	15/5						2.3	5.8
	20/5						3	7.7
	30/5						4.5	11.5
	40/5						6	15.3
	50/5						7.5	19.1
	75/5						11.3	28.7
	100/5						15	38.3
	150/5						22.5	44
	200/5						24.5	44
	300/5							
LZZQB6-10	20/5	0.2/10P15 0.5/10P15	10	10	10	15	6	15
	30/5						8	20
	40/5						12	30
	50/5						16	40
	75/5						20	50
	100/5		15	15	20	30	31.5	80
	150/5							
	200/5							
	300/5		20	20	30	40	44.5	80
	400/5							
	500/5							
	600/5		20	20	30	40	63	110
	800/5							
	1000/5							
	1200/5							
	1500/5							

注：用户如有特殊要求可与我公司协商确定，动热稳定可按用户要求。

Note: Any special requirements can be negotiated with us, thermal and heat both stable, we can customized your requirement.

◆ 外形及安装尺寸 Overall dimension drawing

